


SPECIFICATIONS

Size	Metric	British
Max. Working Height	22.22m	72ft 11in
Max. Platform Height	20.22m	66ft 4in
Max. Operating Range(+0.6m)	15.41m	50ft 7in
Max. Platform Range	14.81m	48ft 7in
Flatbed Transport Dimensions (L×W×H)	6.75m×2.44m×2.70m	22ft 2in×8ft×8ft 10in
Standard Container Transport	All Applicable	All Applicable
Platform Size(Length×Width)	1.83m×0.79m	6ft×2ft 7in
Turntable Tailswing	1.24m	4ft 1in
Ground Clearance (A)	0.31m	1ft
Wheelbase B	2.40m	7ft 10in
Turning Radius(Inside/Outside)	3m/4.73m	9ft 10in/15ft 6in
Tyres	315/55D20	315/55D20

320kg	705lb
2	2
35%	35%
6.0km/h	3.7mph
1.1km/h	0.7mph
X-5°/Y-5°	X-5°/Y-5°
360°Continuous	360°Continuous
180°	180°
132°	132°
	2 35% 6.0km/h 1.1km/h X-5°/Y-5° 360°Continuous 180°

Weight			
Overall Weight	9150kg	20172lb	

Power			
Diesel Engine	Kubota D1105	Kubota D1105/18.2kW Kubota D1105/18.2kW	
Diesel Tank	115L	30gal	
Hydraulic Tank	145L	38gal	

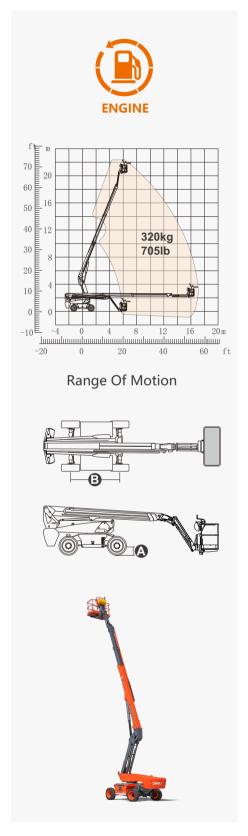





FEATURES

Standard Items

- 1.50m (4ft 11in) Jib
- Front Oscillating Axle
- Two-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- Ac Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle

For Construction Machinery

- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits
- 12V DC Auxiliary Power
- Kubota D1105 18kW 2600rpm Diesel Engine
- Hydraulic Oil Radiator
- Anti-restart Engine Protection
- Anti-reverse Engine Device
- Auto Engine Fault Shutdown











Telescopic **Boom-BT**

Working Height-22m

Jib

Diesel Engine

Rough Terrain-RT



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deging, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











