

SPECIFICATIONS


| Dimension | Metric | British |
|-------------------------------------|--------------|-----------------|
| Max. Working Height(Indoor) | 6.50m | 21ft 4in |
| ★ Max. Working Height(Outdoor) | 5.60m | 18ft 4in |
| Max. Platform Height(Indoor) B | 4.50m | 14ft 9in |
| ★ Max. Platform Height(Outdoor) | 3.60m | 11ft 10in |
| Overall Length C | 1.46m | 4ft 9in |
| Overall Width D | 0.76m | 2ft 6in |
| Overall Height(Rails Up) E | 2.06m | 6ft 9in |
| Overall Height(Rails Down) F | 1.69m | 5ft 6in |
| Platform Size(Length ×Width) | 1.29m×0.70m | 4ft 3in×2ft 3in |
| Platform Extension Size G | 0.60m | 2ft |
| Ground Clearance(Stowed/Raised) | 0.06m/0.015m | 2in/1in |
| Wheelbase H | 1.06m | 3ft 6in |
| Turning Radius(Inside/Outside) | 0.40m/1.55m | 1ft 4in/5ft 1in |
| Tyres | φ305×100mm | φ305×100mm |

| Performance | | |
|-----------------------------------|-----------|-----------|
| S.W.L | 240kg | 529lb |
| S.W.L on Extension | 100kg | 220lb |
| Max. Occupants (Indoor/Outdoor) | 2/0 | 2/0 |
| ★ Max. Occupants (Indoor/Outdoor) | 2/1 | 2/1 |
| Gradeability | 25% | 25% |
| Travel Speed(Stowed) | > 4.0km/h | > 2.49mph |
| Travel Speed(Raised) | > 0.4km/h | > 0.25mph |
| Max. Working Slope(X/Y) | 1.5°/3° | 1.5°/3° |
| Up/Down Speed | 28/22sec | 28/22sec |

| Weight | | | |
|----------------|-------|--------|--|
| Overall Weight | 950kg | 2094lb | |

| Power | | |
|----------------|----------------|----------------|
| Hydraulic Tank | 3L | 0.6gal |
| Battery | 24V/85Ah | 24V/85Ah |
| Charger | 24V/15A | 24V/15A |
| Driving Motor | 2x24VDC/0.45kW | 2x24VDC/0.45kW |
| Lifting Motor | 24VDC/1.2kW | 24V/1.2kW |

Note: Parameters with "★" are optional

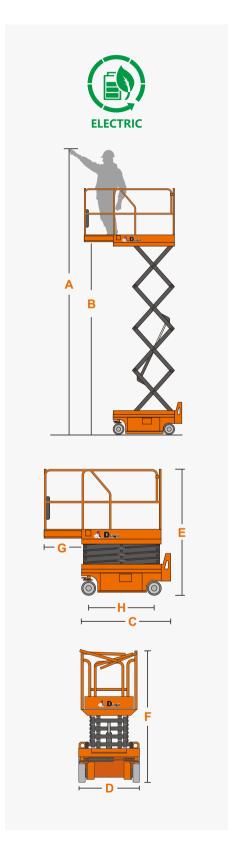





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- · Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











