


SPECIFICATIONS

Metric	British
8.00m	26ft 3in
6.00m	19ft 8in
2.48m	8ft 2in
1.15m	3ft 9in
2.23m	7ft 4in
1.70m	5ft 7in
2.27m×1.12m	7ft 5in×3ft 8in
0.90m	2ft 11in
0.10m/0.019m	4in/1in
1.87m	6ft 2in
0m/2.20m	0in/7ft 3in
φ381×127mm	φ381×127mm
	8.00m 6.00m 2.48m 1.15m 2.23m 1.70m 2.27m×1.12m 0.90m 0.10m/0.019m 1.87m 0m/2.20m

Performance		
S.W.L	540kg	1190lb
S.W.L On Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/2	2/2
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	2.17mph
Travel Speed(Raised)	0.8km/h	0.50mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	31/30sec	31/30sec

Weight		
Overall Weight	1950kg	4299lb

Power		
Hydraulic Tank	20L	5.3gal
Lead-acid Battery	24V/185Ah	24V/185Ah
Lithium Battery	24V/180Ah	24V/180Ah
Charger	24V/30A	24V/30A
Lifting Motor	15VAC/3.5kW	15VAC/3.5kW

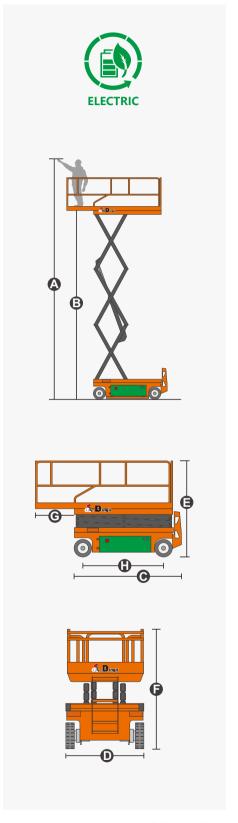



Self-propelled Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











