


SPECIFICATIONS

Dimension	Metric	British
Max. Working Height A	15.00m	49' 3"
Max. Platform Height B	13.00m	42' 8"
Max. Drive Height	13.00m	42' 8"
Overall Length C	4.88m	16'
Overall Width D	2.33m	7' 8"
Overall Height(Rails Up) E	3.02m	9' 11"
Overall Height(Rails Down) F	2.26m	7' 5"
Platform Size(Length ×Width)	4.88m×1.83m	16'×6'
Platform Extension Size G / H	1.43m/1.13m	4' 8"/3' 8"
Ground Clearance(Stowed/Raised)	0.30m	1'
Wheelbase	2.86m	9' 5"
Turning Radius(Inside/Outside)	2.70m/5.50m	8' 10"/18'
Tyres	315/55/D20	315/55/D20

Performance		
S.W.L	680kg	1499lb
S.W.L on Extension	227kg	500lb
Max. Occupants(Indoor/Outdoor)	7/7	7/7
Gradeability	40%	40%
Travel Speed(Stowed)	≯6.0km/h	≯3.73mph
Travel Speed(Raised)	≯1.0km/h	≯0.62mph
Max. Working Slope(X/Y)	2°/3°	2°/3°
Up/Down Speed	73/62sec	73/62sec

Weight		
Overall Weight(Without Outriggers)	7240kg	15961lb
Overall Weight(With Outriggers)	8140kg	17946lb

Power		
Diesel Engine	Kubota D1105/18.2kW	Kubota D1105/18.2kW
Diesel Tank	80L	21gal
Hydraulic Tank	120L	31gal
Lithium battery	80VDC/67.5Ah	80VDC/67.5Ah
Motor	80VDC/10kW	80VDC/10kW

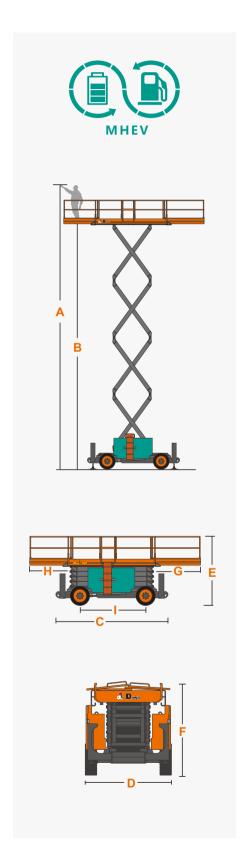



Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Drive axle
- Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











