


## **SPECIFICATIONS**

Size	Metric	British
Max. Working Height A	15.00m	49ft 3in
Max. Platform Height B	13.00m	42ft 8in
Overall Length(Without Outriggers)	3.98m	13ft 1in
Overall Length(With Outriggers) C	4.88m	16ft
Overall Width D	2.33m	7ft 8in
Overall Height(Rails Up) <b>E</b>	3.02m	9ft 11in
Overall Height(Rails Down) <b>F</b>	2.26m	7ft 5in
Platform Size(Length×Width)	4.88m×1.83m	16ft×6ft
Platform Extension Size <b>G/H</b>	1.43m/1.16m	4ft 8in/3ft 10in
Ground Clearance	0.30m	1ft
Wheelbase I	2.86m	9ft 5in
Turning Radius(Inside/Outside)	2.70m/5.50m	8ft 10in/18ft
Tyres	315/55/D20	315/55/D20

Performance		
S.W.L	680kg	1499lb
S.W.L On Extension	227kg	500lb
Max. Occupants (Indoor/Outdoor)	7/7	7/7
Gradeability	40%	40%
Travel Speed(Stowed)	≯5.0km/h	≯3.1mph
Travel Speed(Raised)	≯1.0km/h	≯0.62mph
Max. Working Slope(X/Y)	2°/3°	2°/3°
Up/Down Speed	73/62sec	73/62sec

Weight			
Overall Weight(Without Outriggers)	7100kg	15653lb	
Overall Weight(With Outriggers)	8000kg	17637lb	

Power		
Diesel Engine	18.2kW/3000rpm	18.2kW/3000rpm
Diesel Tank	80L	21gal
Hydraulic Tank	120L	31gal

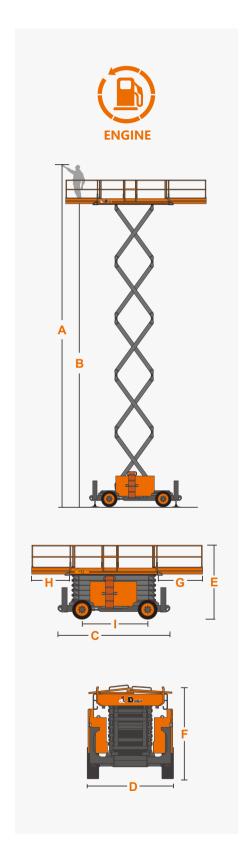



**Scissor Lifts** 



## **FEATURES**

## Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Drive axle
- Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











