


SPECIFICATIONS

| Size | Metric | British |
|----------------------------------|--------------|-----------------|
| Max. Working Height(Indoor) | 15.70m | 51ft 6in |
| Max. Working Height(Outdoor) | 12.00m | 39ft 4in |
| Max. Platform Height(Indoor) | 13.70m | 44ft 11in |
| Max. Platform Height(Outdoor) | 10.00m | 32ft 10in |
| Overall Length © | 2.84m | 9ft 4in |
| Overall Width ① | 1.39m | 4ft 7in |
| Overall Height(Rails Up) | 2.62m | 8ft 7in |
| Overall Height(Rails Down) | 2.09m | 6ft 10in |
| Platform Size(Length×Width) | 2.64m×1.12m | 8ft 8in×3ft 8in |
| Platform Extension Size © | 0.90m | 2ft 11in |
| Ground Clearance(Stowed/Raised) | 0.10m/0.019m | 4in/1in |
| Wheelbase (| 2.22m | 7ft 3in |
| Turning Radius(Inside/Outside) | 0m/2.70m | 0in/8ft 10in |
| Tyres | φ381×127mm | φ381×127mm |

| Performance | | |
|--------------------------------|-------------|-------------|
| S.W.L | 250kg | 551lb |
| S.W.L On Extension | 113kg | 249lb |
| Max. Occupants(Indoor/Outdoor) | 2/1 | 2/1 |
| Gradeability | 25% | 25% |
| Travel Speed(Stowed) | 5.0km/h | 3.10mph |
| Travel Speed(Raised) | 0.8km/h | 0.50mph |
| Max. Working Slope | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed | 72/67sec | 72/67sec |

| Weight | | | |
|----------------|--------|--------|--|
| Overall Weight | 3470kg | 7650lb | |

| Power | | |
|-------------------|--------------|--------------|
| Hydraulic Tank | 20L | 5.3gal |
| Lead-acid Battery | 24V/240Ah | 24V/240Ah |
| Lithium Battery | 24V/220Ah | 24V/220Ah |
| Charger | 24V/30A | 24V/30A |
| Driving Motor | 15VAC/0.87kW | 15VAC/0.87kW |
| Lifting Motor | 15VAC/3.5kW | 15VAC/3.5kW |
| | | |

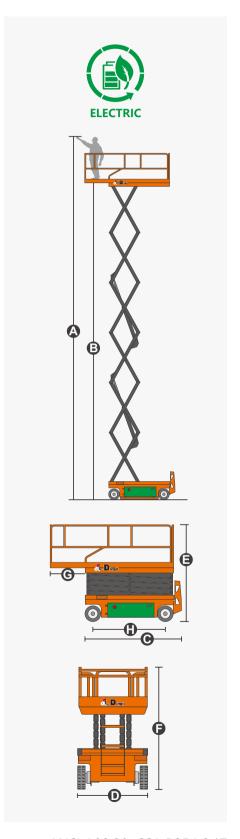

ANSI A92.20, CSA B354.6.17



Self-propelled Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











