


## **SPECIFICATIONS**

Size	Metric	British
Max. Working Height(Indoor)	15.70m	51ft 6in
Max. Working Height(Outdoor)	12.00m	39ft 4in
Max. Platform Height(Indoor)	13.70m	44ft 11in
Max. Platform Height(Outdoor)	10.00m	32ft 10in
Overall Length <b>©</b>	2.84m	9ft 4in
Overall Width <b>()</b>	1.39m	4ft 7in
Overall Height(Rails Up)	2.62m	8ft 7in
Overall Height(Rails Down)	2.09m	6ft 10in
Platform Size(Length×Width)	2.64m×1.12m	8ft 8in×3ft 8in
Platform Extension Size <b>©</b>	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase <b>(</b>	2.22m	7ft 3in
Turning Radius(Inside/Outside)	0m/2.70m	0in/8ft 10in
Tyres	φ381×127mm	φ381×127mm

Performance		
S.W.L	250kg	551lb
S.W.L On Extension	113kg	249lb
Max. Occupants(Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	2.17mph
Travel Speed(Raised)	0.8km/h	0.50mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	72/67sec	72/67sec

Weight			
Overall Weight	3440kg	7583lb	

Power		
Hydraulic Tank	20L	5.3gal
Lead-acid Battery	24V/240Ah	24V/240Ah
Lithium Battery	24V/220Ah	24V/220Ah
Charger	24V/30A	24V/30A
Lifting Motor	15VAC/3.5kW	15VAC/3.5kW

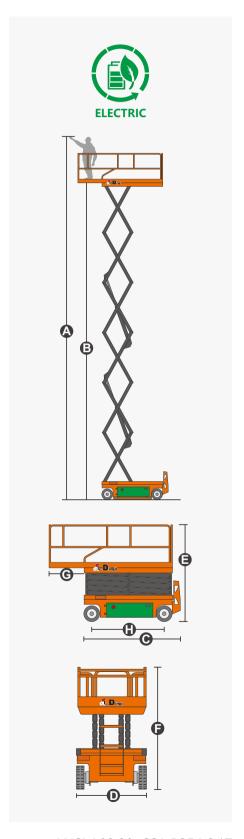

ANSI A92.20, CSA B354.6.17





## **FEATURES**

## Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











