DINGLI Exceed · New Height

SPECIFICATIONS

| Size | Metric | British |
|------------------------------------|-------------|-----------------|
| Max. Working Height A | 18.00m | 59ft 1in |
| Max. Platform Height B | 16.00m | 52ft 6in |
| Overall Length C | 4.88m | 16ft |
| Overall Width D | 2.33m | 7ft 8in |
| Overall Height(Rails Up) E | 3.23m | 10ft 7in |
| Overall Height(Rails Down) F | 2.47m | 8ft 1in |
| Platform Size(Length×Width) | 4.88m×1.83m | 16ft×6ft |
| Platform Extension Size G/H | 1.43m/1.13m | 4ft 8in/3ft 8in |
| Ground Clearance | 0.30m | 1ft |
| Wheelbase I | 2.86m | 9ft 5in |
| Turning Radius(Inside/Outside) | 2.70m/5.50m | 8ft 10in/18ft |
| Tyres | 315/55/D20 | 315/55/D20 |


| Performance | | |
|---------------------------------|--------------------------------|--------------------------------|
| S.W.L | 680kg | 1499lb |
| S.W.L On Extension | 227kg | 500lb |
| Max. Occupants (Indoor/Outdoor) | 4/4 | 4/4 |
| Gradeability | 40% | 40% |
| Travel Speed(Stowed) | ≽5.5km/h | ≽3.41mph |
| Travel Speed(Raised)(<11m/≥11m) | ≯1.0km/h <mark>≯0.6km/h</mark> | ≽0.62mph <mark>≽0.37mph</mark> |
| Max. Working Slope(<11m/≥11m) | 2°/3° 1.5°/3° | 2°/3° <mark>1.5°/3°</mark> |
| Up/Down Speed | 80/74sec | 80/74sec |


| Weight | | |
|---|--------|---------|
| Overall Weight(Lead-acid Battery) | 9210kg | 20304lb |
| Overall Weight(Lithium Battery) \star | 8820kg | 19445lb |

| Power | | |
|-------------------|------------|------------|
| Hydraulic Tank | 110L | 29gal |
| Lithium Battery ★ | 48V/450Ah | 48V/450Ah |
| Lead-acid Battery | 48V/420Ah | 48V/420Ah |
| Charger | 48V/60A | 48V/60A |
| Driving Motor | 32VAC/9kW | 32VAC/9kW |
| Lifting Motor | 32VAC/15kW | 32VAC/15kW |

Note: Parameters with " \bigstar " are optional



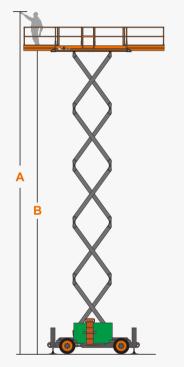







FEATURES

Standard Items

- Drivable At Full Height
- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Drive axle
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219 Telephone: +86(572)8681688

E-Mail: export@cndingli.com Https://en.cndingli.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission. 2024-12

