


SPECIFICATIONS

| Size | Metric | British |
|----------------------------------|--------------|---------------------|
| Max. Working Height(Inside) | 19.00m | 62ft 4in |
| Max. Working Height(Outside) | 19.00m | 62ft 4in |
| Max. Platform Height(Inside) | 17.00m | 55ft 9in |
| Max. Platform Height(Outside) | 17.00m | 55ft 9in |
| Overall Length © | 3.76m | 12ft 4in |
| Overall Width () | 1.25m | 4ft 1in |
| Overall Height(Rails Up) | 3.24m | 10ft 8in |
| Overall Height(Rails Down) | 2.47m | 8ft 1in |
| Platform Size(Length×Width) | 3.44m×1.17m | 11ft 3in × 3ft 10in |
| Platform Extension Size G | 1.20m | 3ft 11in |
| Ground Clearance(Stowed/Raised) | 0.15m/0.025m | 6in/1in |
| Wheelbase (1) | 2.89m | 9ft 6in |
| Turning Radius(Inside/Outside) | 1.00m/3.50m | 3ft 3in/11ft 6in |
| Tyres | 22×9×16 | 22×9×16 |

| Performance | | |
|--------------------------------|-------------|-------------|
| S.W.L | 500kg | 1102lb |
| S.W.L On Extension | 500kg | 1102lb |
| Max. Occupants(Inside/Outside) | 2/0 | 2/0 |
| Gradeability | 30% | 30% |
| Travel Speed(Stowed) | 4.5km/h | 2.80mph |
| Travel Speed(Raised) | 0.4km/h | 0.25mph |
| Max. Working Slope | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed | 70/76sec | 70/76sec |
| | | |

| Weight | | | |
|----------------|--------|---------|--|
| Overall Weight | 7140kg | 15741lb | |

| Power | | |
|----------------|---------------|---------------|
| Hydraulic Tank | 50L | 13.2gal |
| Battery | 48V/360Ah | 48V/360Ah |
| Charger | 48V/60A | 48V/60A |
| Driving Motor | 2×32VAC/3.3kW | 2×32VAC/3.3kW |
| Lifting Motor | 48VDC/12.0kW | 48VDC/12.0kW |
| | | |

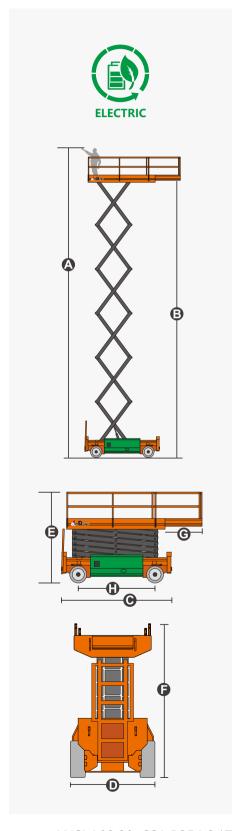

ANSI A92.20, CSA B354.6.17







FEATURES

Standard Items

- Proportional Joystick Controls
- · Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Solid Rubber Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Brake System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











