JCPT2212DC




SPECIFICATIONS

Size	Metric	British
Max. Working Height(Inside)	22.00m	72ft 2in
Max. Working Height(Outside)	22.00m	72ft 2in
Max. Platform Height(Inside)	20.00m	65ft 7in
Max. Platform Height(Outside)	20.00m	65ft 7in
Overall Length 6	4.72m	15ft 6in
Overall Width (1.25m	4ft 1in
Overall Height(Rails Up)	3.82m	12ft 6in
Overall Height(Rails Down)	2.99m	9ft 10in
Platform Size(Length×Width)	4.30m×1.19m	14ft 1in × 3ft 11in
Platform Extension Size G	1.80m	5ft 11in
Ground Clearance(Stowed/Raised)	0.20m/0.02m	8in/1in
Wheelbase (3.18m	10ft 5in
Turning Radius(Inside/Outside)	1.60m/2.30m	5ft 3in/7ft 7in
Tyres	28×10-22	28×10-22

Performance		
S.W.L	750kg	1653lb
S.W.L On Extension	750kg	1653lb
Max. Occupants(Inside/Outside)	2/2	2/2
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	2.17mph
Travel Speed(Raised)	0.5km/h	0.31mph
Max. Working Slope	1°(0°)	1°(0°)
Up/Down Speed	85/75sec	85/75sec

Weight			
Overall Weight	12350kg	27227lb	

Power		
Hydraulic Tank	130L	34gal
Battery	48V/630Ah	48V/630Ah
Charger	48V/60A	48V/60A
Driving Motor	4×32VAC/3.3kW	4×32VAC/3.3kW
Lifting Motor	2×48VDC/8.0kW	2×48VDC/8.0kW

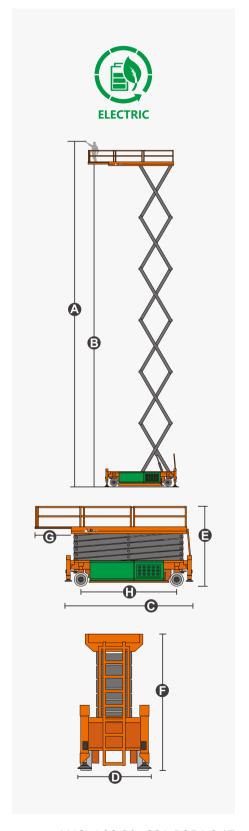

ANSI A92.20, CSA B354.6.17





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- · Drivable At Full Height



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











