


SPECIFICATIONS

Metric	British
35.00m	114' 10"
33.00m	108' 3"
7.15m	23' 5"
1.40m	4' 7"
4.23m	13' 10"
3.36m	11'
6.50m×1.20m	21' 4"×3' 11"
1.90m	6' 3"
0.19m/0.02m	7"/1"
5.43m	17' 10"
3.20m/3.80m	10' 6"/12' 6"
28×14×22	28×14×22
	35.00m 33.00m 7.15m 1.40m 4.23m 3.36m 6.50m×1.20m 1.90m 0.19m/0.02m 5.43m 3.20m/3.80m

Performance		
S.W.L	750kg	1653lb
S.W.L on Extension	750kg	1653lb
Max. Occupants (Indoor/Outdoor)	2/2	2/2
Gradeability	25%	25%
Travel Speed(Stowed)	≯1.5km/h	≯0.93mph
Travel Speed(Raised)	≯0.1km/h	≯0.06mph
Max. Working Slope(X/Y)	1°/0°	1°/0°
Up/Down Speed	180/180sec	180/180sec

Weight			
Overall Weight	28400kg	62611lb	

Power		
Hydraulic Tank	280L	74gal
Lithium Battery	80V/620Ah	80V/620Ah
Charger	80V/80A	80V/80A
Driving Motor	4×56VAC/6kW	4×56VAC/6kW
Lifting Motor	53VAC/28kW	53VAC/28kW

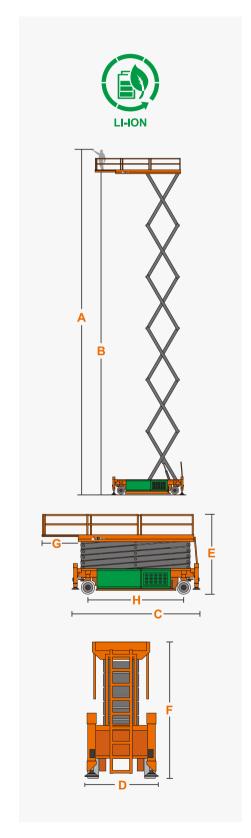





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Four-Wheel Drive
- Four-Wheel Steering
- · Drivable At Full Height
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Visual Level
- Outrigger Mats



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











